



MySat

SCANNING INSTRUCTIONS **KRS BOX**





MySat

ON THE MYSAT REMOTE




PRESS **MENU**

STEP 1



MySat

CHANNEL SEARCH WILL APPEAR.
GO RIGHT AND PRESS OK ON ANTENNA SETTINGS

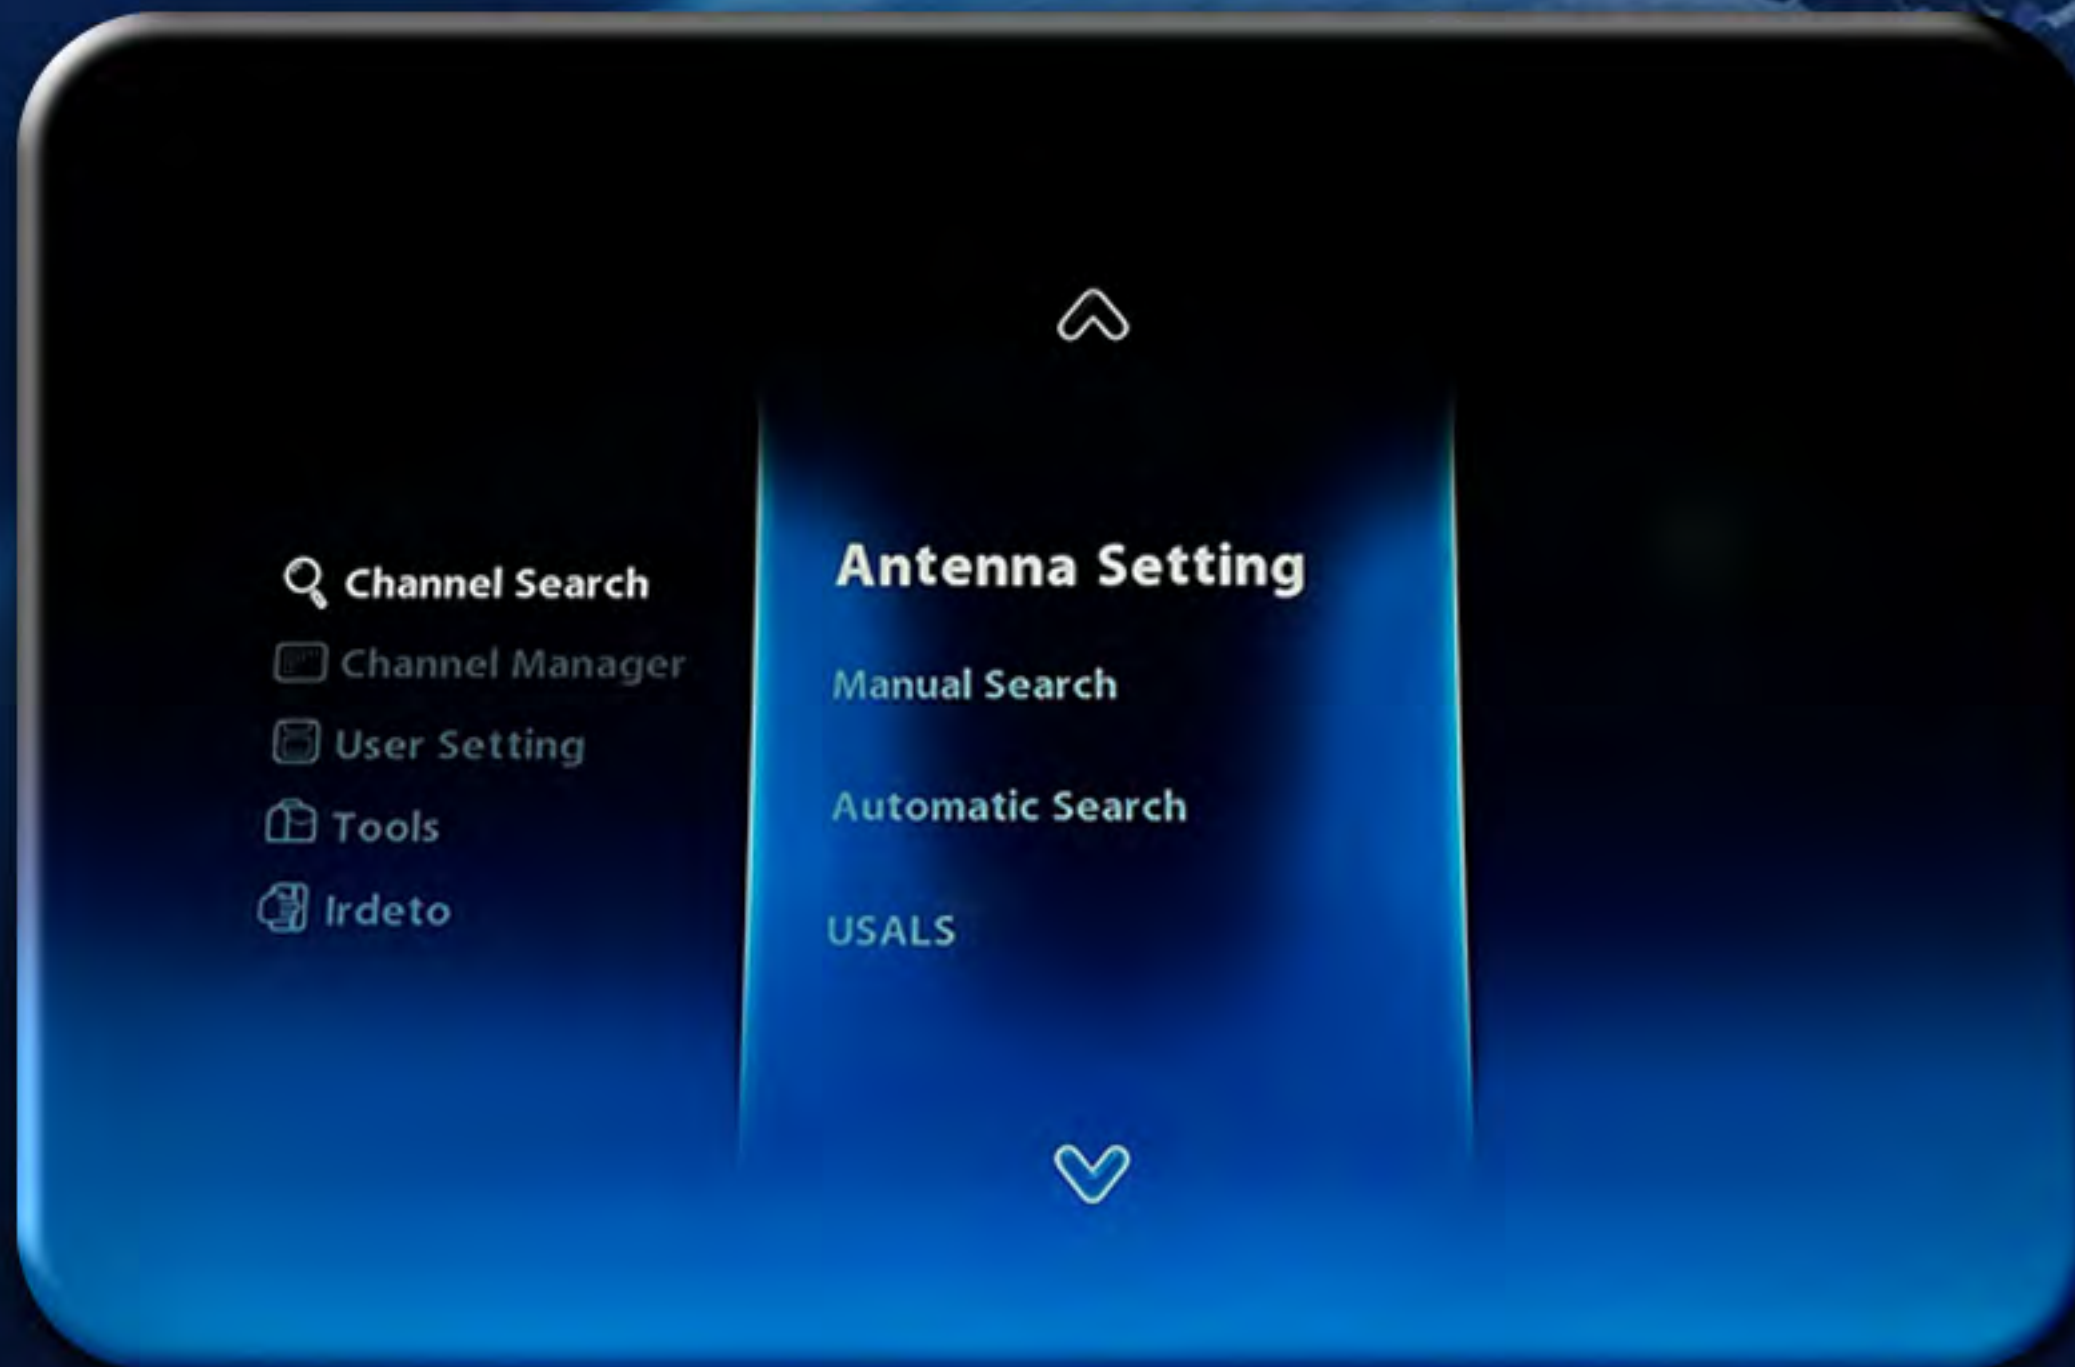

STEP 2



MySat

PRESS OK ON **TRANSPONDER**

Antenna Setting

0% 0%

Satellite	Intelsat 8 Ku
Transponder	< 12646/H/28066 >
LNB Type	11300
DiSEqC	Off
DiSEqC Port	Off
22 KHz	Off
LNB Power	On
Network Search	Yes
Scan Mode	FTA+CAS

Search Edit Transponder Exit

STEP 3



MySat

PRESS THE **GREEN** BUTTON TO ADD

Edit Transponder

< Intelsat 8 Ku:166.0° E >

- 001 12646MHz 28066Ks/s Hor DVB-S 3/4 Ok
- 002 12726MHz 28060Ks/s Hor DVB-S 3/4 Ok
- 003 12286MHz 28800Ks/s Hor DVB-S 3/4
- 004 12491MHz 04400Ks/s Ver DVB-S 3/4
- 005 12502MHz 03074Ks/s Ver DVB-S 3/4
- 006 12557MHz 13845Ks/s Hor DVB-S 3/4
- 007 12575MHz 13845Ks/s Hor DVB-S 2/3
- 008 12596MHz 02776Ks/s Hor DVB-S 3/4
- 009 12599MHz 04166Ks/s Hor DVB-S2 Auto

● Delete ● Add ● Edit EXIT Save

STEP 4



MySat

**CHANGE FREQUENCY TO
"12606" AND SYMBOL TO "30000"
AND POLARIZATION TO HORIZONTAL (HOR)
AND PRESS SAVE**

Add Transponder

Satellite	Intelsat 8 Ku
Frequency	00000
Symbol Rate	00000
Polarization	VER
Transport Spec	Auto
FEC	Auto


0-9 Edit EXIT Save

STEP 5



MySat

PRESS THE **RED** BUTTON TO SCAN
AND WAIT UNTIL SCAN IS **FINISHED**

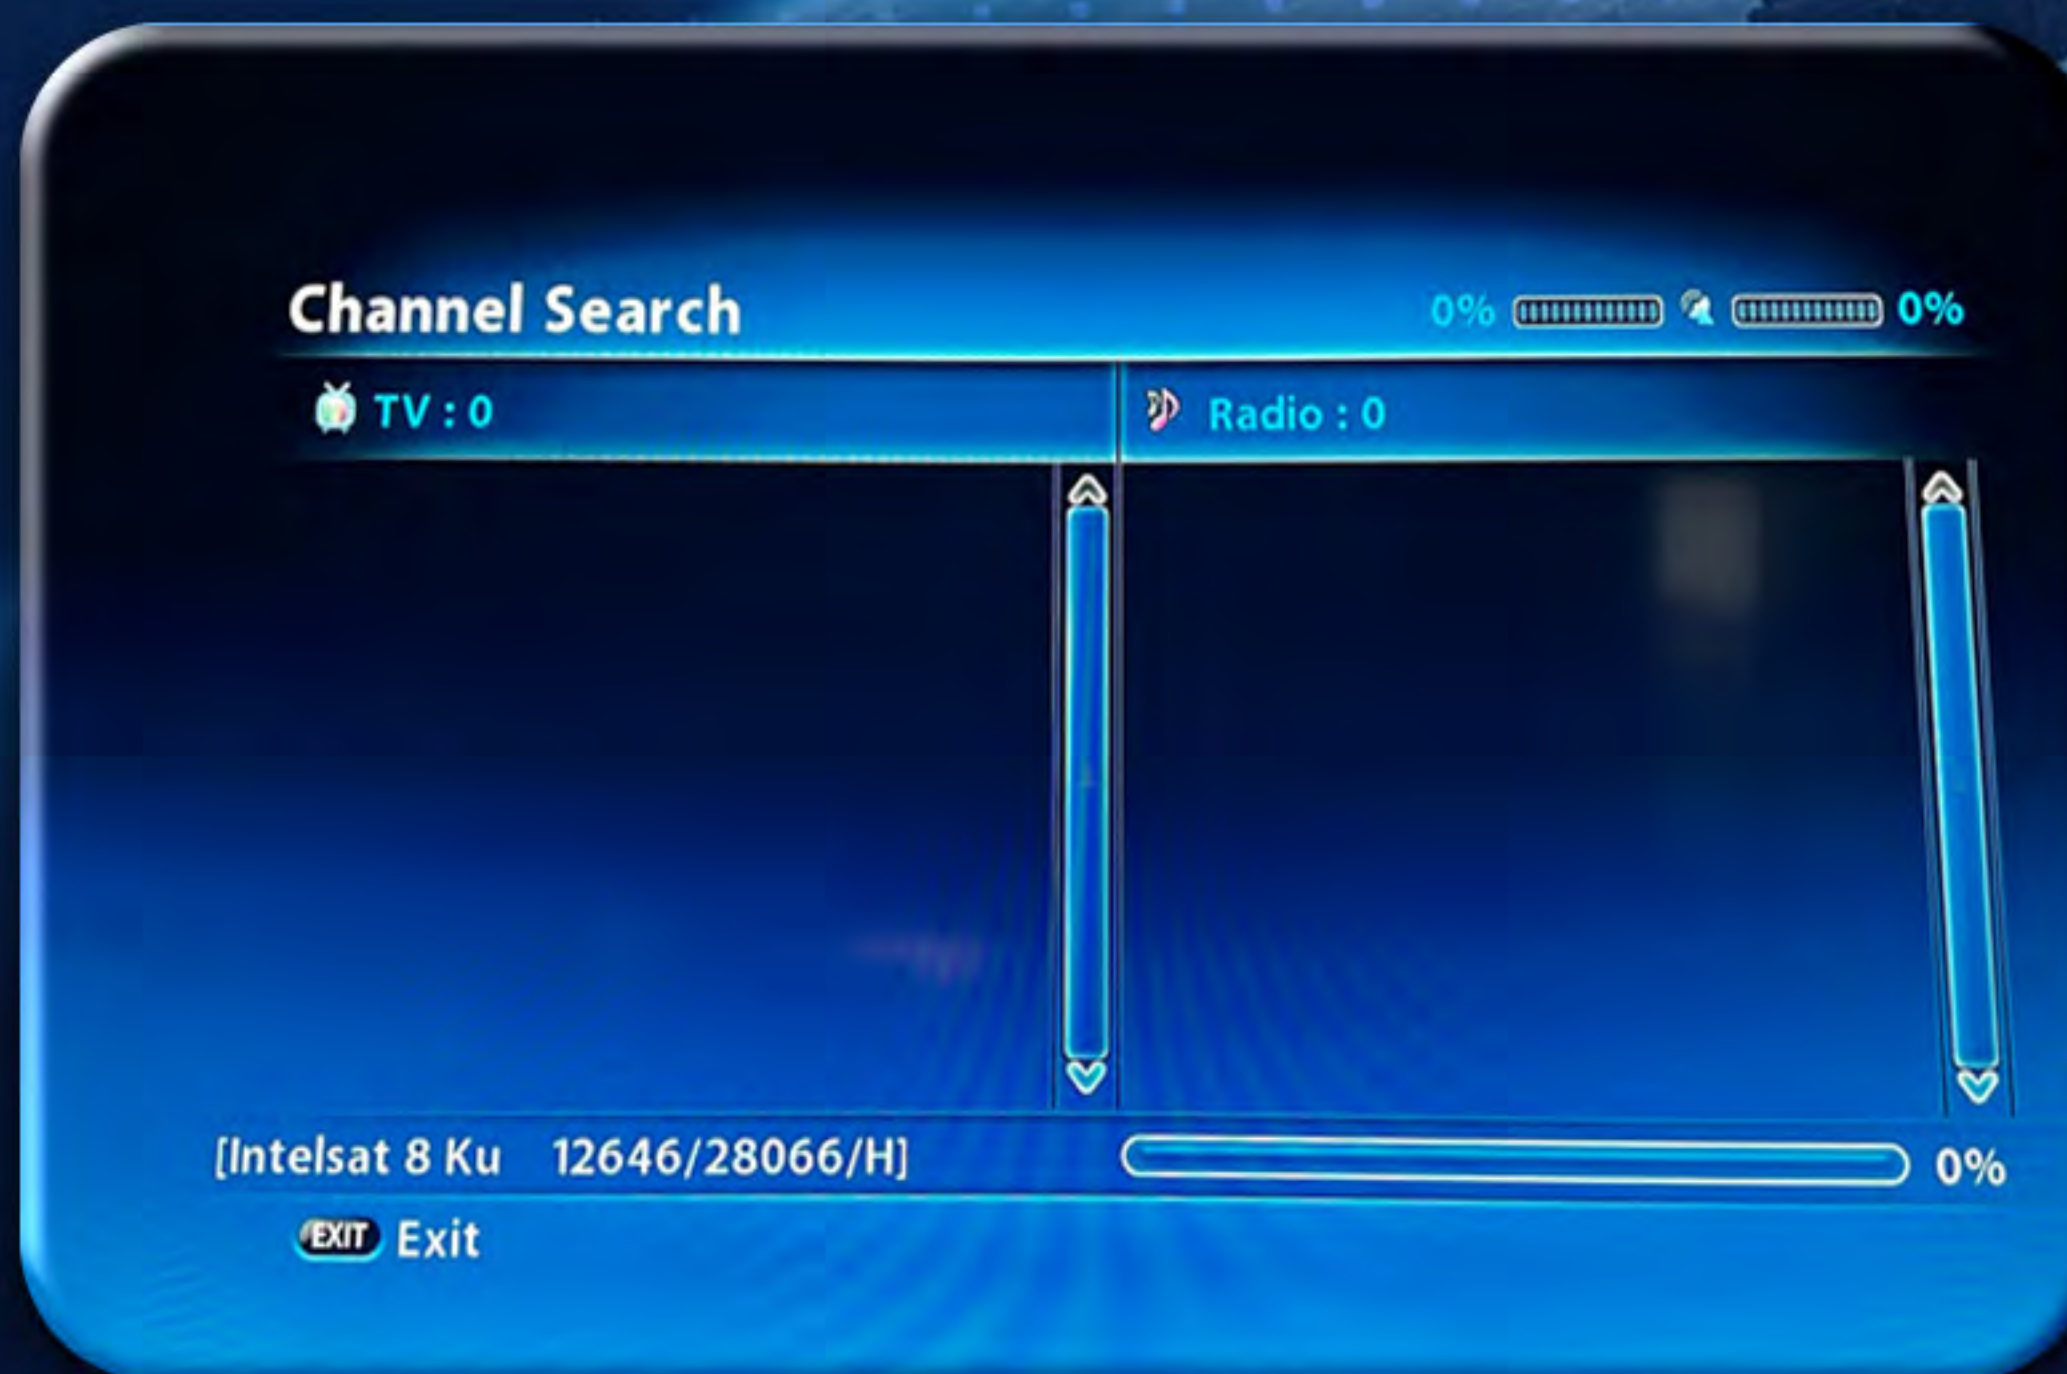

STEP 6